


Versatile and customizable, the SureLinx™ 8100c builds on the flexibility and efficiency of the SureLinx 8100 by adding an on-board computer and more industry-standard interfaces to enable new opportunities.



The SureLinx 8100c terminal's integrated on-board computer (OBC) with a C-programming environment and API library allows for rapid development of sophisticated applications that cater to the asset tracking, fleet management, remote surveillance and SCADA markets.

Industry standard RS232, RS485 and CANbus interfaces enable applications where text messaging, connections to sensor networks and on-board vehicle diagnostic capabilities are required – all designed to create a highly responsive and flexible communication platform.

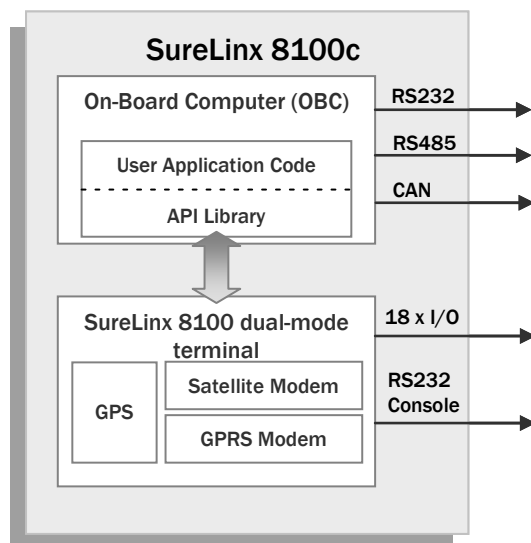

WHY SURELINX 8100c?

- **C-programmable on-board computer** with an operating system supported by feature-rich Integrated Development Environment (IDE) tools and enables creation of customized solutions.
- **Application Framework (API Library)** provides ready-made drivers to access resources such as satellite/cellular modems, GPS and I/O.
- **CANbus interface** supports 3rd party protocol stacks, such as J1939, to support engine monitoring capabilities and on-board diagnostics in fleet management applications.
- **RS485 serial interface** supports 3rd party protocols such as Modbus® for SCADA and other sensor network monitoring applications.
- **RS232 serial interface** supports a variety of generic devices such as text-messaging terminals and barcode readers.

All the features and benefits of the SureLinx 8100 including:

- **Offer a dual-mode satellite/cellular solution quickly** with the fully-integrated communication package.
- **Be informed of specific events** and maintain low messaging costs with exception-based reporting.
- **Decrease messaging costs** with intelligent message routing by automatically selecting which network to use.
- **Store detailed historical data** with the data log. Data can be extracted when convenient and cost-effective.
- **Quickly add new features** or customize the configuration of the satellite device without dispatching a technician with over-the-air programming.

SURELINX™ 8100c SATELLITE/GPRS TERMINAL

PHYSICAL

Size	<ul style="list-style-type: none">Transceiver: 155 x 124 x 41 mmSatellite antenna: 127 x 93 x 23 mm
Mass	<ul style="list-style-type: none">Transceiver: ~258 gSatellite antenna: 379 g (with 5 m cable)

ENVIRONMENTAL

Operating Temperature	<ul style="list-style-type: none">Transceiver: -30°C to +65°CSatellite antenna: -40°C to +85°CGPRS antenna: -25°C to +70°C
Storage Temperature	<ul style="list-style-type: none">Transceiver and antennas: -40°C to +85°C
Humidity	<ul style="list-style-type: none">95% RH @ +30°C non-condensing
Dust & Water Ingress	<ul style="list-style-type: none">Transceiver: IP40/NEMA1Satellite antenna: IP67/NEMA-4X
Vibration	<ul style="list-style-type: none">5-20 Hz; 1.92 m/s³ random noise20-500 Hz; -3dB octave random noise
Shock (survival)	<ul style="list-style-type: none">Half sine 6ms, 300 m/s²

ELECTRICAL

Input Voltage	<ul style="list-style-type: none">9 VDC to 32 VDC
Power Consumption (typical @ 12VDC, 22°C)	<ul style="list-style-type: none">Transmit mode: 10.6W (satellite)Tracking mode (GPS on, GPRS on): 1.4W
Mating Connector	<ul style="list-style-type: none">Transceiver I/O: JAE IL-AG5-30S-D3C1Satellite Antenna: Fakra FAI-NARP-PCB-MGPRS Antenna: SMA female

SATELLITE COMMUNICATIONS (D+/ISATM2M)

Frequency	<ul style="list-style-type: none">Rx: 1525.0 to 1559.0 MHzTx: 1626.5 to 1660.5 MHz
EIRP	<ul style="list-style-type: none">9 dBW max
Elevation Angle	<ul style="list-style-type: none">0 to +90 degrees

GSM/GPRS COMMUNICATIONS

Frequency	<ul style="list-style-type: none">850/900/1800/1900 MHz
GPRS data	<ul style="list-style-type: none">Class 12 multislotted; Coding scheme 1 to 4Class B mobile station; Full PBCCH supportSupports NMEA formatted output from GPS
Output Power	<ul style="list-style-type: none">Class 4 – 33dBm ± 2dB for EGSM 850/900Class 1 – 30dBm ± 2dB for GSM 1800/1900
SIM Card	<ul style="list-style-type: none">3.3 V SIM (Customer Supplied)

GPS

Channels	<ul style="list-style-type: none">16 channels; 1575.42 MHz
Acquisition	<ul style="list-style-type: none">Cold-start: 34s; SuperSense®: -148dBm
Accuracy	<ul style="list-style-type: none">3 m CEP; 5 m SEP

CERTIFICATIONS

Satellite	<ul style="list-style-type: none">Inmarsat D+/IsatM2m Type Approval
Regulatory	<ul style="list-style-type: none">FCC, PTCRB, RoHS, CE Mark (R&TTE), Anatel, IC pending

DATA LOG

Capacity	<ul style="list-style-type: none">320 kB; Up to 17,200 points
----------	---

PROGRAMMING CAPABILITIES

Script Logic	<ul style="list-style-type: none">128 Actions; 64 Alarms; 64 Timers; 32 Data transformers128 Geofences (circular, rectangular, polygons)
--------------	---

ON-BOARD COMPUTER (BUS APPLICATION CONTROLLER)

Programming	<ul style="list-style-type: none">C with Application Framework Files; OpenRTOS™Use with Microchip IDE
Processor	<ul style="list-style-type: none">Microchip dsPIC33FJ256GP710-I/PF256KB program memory; 30KB SRAM; 2MB Flash

EXTERNAL INTERFACES

Serial	<ul style="list-style-type: none">RS232: 1 console interface, 1 peripheral interfaceRS232: Supports optional NMEA outputRS485: 1 peripheral interface
CANbus	<ul style="list-style-type: none">Supports CAN 1.2, CAN 2.0A and CAN 2.0BStandard and extended data framesProgrammable bit rate up to 1 Mbps
Analog/Digital	<ul style="list-style-type: none">Up to 18 software configurable inputs or outputs4 wake-up enabled

FROM-TERMINAL MESSAGING

IsatM2M	<ul style="list-style-type: none">Up to 192 bytes
GPRS	<ul style="list-style-type: none">Up to 200-byte payload

TO-TERMINAL MESSAGING

IsatM2M	<ul style="list-style-type: none">4 alert codes + Up to 100 bytes
GPRS	<ul style="list-style-type: none">Up to 200 bytes

ORDERING CODES

SM200254-GS5	<ul style="list-style-type: none">SureLinX 8100c with CAN/RS485 Bus Application ControllerSatellite antenna, side-entry cable (5m cable, Fakra)GPRS antenna (2.5m cable, SMA)
SM200254-GM5	<ul style="list-style-type: none">SureLinX 8100c with CAN/RS485 Bus Application ControllerSatellite antenna, side-entry cable, magnetic base (5m cable, Fakra)GPRS antenna (2.5m cable, SMA)
SM200254-GR5	<ul style="list-style-type: none">SureLinX 8100c with CAN/RS485 Bus Application ControllerSatellite antenna, bottom-mount SMA femaleGPRS antenna (2.5m cable, SMA)
SM200268	<ul style="list-style-type: none">Evaluation Flex-Kit: Includes cables for DMR/SureLinX terminals, airtime, support, training. Order any terminal variant separately

Note: Unpackaged antennas, transceivers and variable length cables are available. Contact a SkyWave representative for more information.



Positioning technology provided by u-blox

About SkyWave Mobile Communications

SkyWave Mobile Communications designs and manufactures integrated D+/IsatM2M satellite terminals, dual-mode satellite/GPRS terminals and provides network services to enable dependable, low-cost, remote management, security and logistics solutions for fixed and mobile assets. SkyWave's products are designed for a broad range of industries including land mobile, marine, oil & gas, SCADA, government and defence.

www.SkyWave.com
Phone: +1 613-836-4844
Email: info@skywave.com

SkyWave